

Rotonics Guido® Freshwater and Fire Protection Tanks


www.rotonics.com/tanks/guido.html

Rotonics-California

- FDA approved high density linear polyethylene (ANSI/NSF Standard 61).
- Impact and corrosion resistant.
- Seamless, one-piece construction.
- Green opaque tanks blend with the environment, provide additional protection from UV rays, and reduce algae growth.
- Designed for containment of water (8.5 lbs./gal.).
- A concrete pad is recommended for installation. However, tanks may be placed on any flat level "compacted" surface.
- Tanks come with a standard 1-1/2" spin weld fill (#02017) and 2" polypropylene discharge adapter (#93200). An optional 4" fire adapter, anti-vortex assemblies, and 3" water tank vents are available.
- Compliant with local, state, and national standards for fire protection.



Rotonics has been a pioneer and, for the last three decades, a leading innovator in the manufacturing of all sizes of both Linear and Crosslink Polyethylene Tanks.



Item#	Size (Gal.)	Dia. (In.)	Ht. w/Lid (In.)	Lid (In.)
76330	330	47	53	8
76331	450	48	66	16
76335	550	47	78	16
76340	600	72	42	16
76350	1000	72	66	16
76353	1200	102	44	16
76351	1300	72	83	16
76360	1500	72	94	16

Item#	Size (Gal.)	Dia. (In.)	Ht. w/Lid (In.)	Lid (In.)
76361	1600	102	56	22
76386	2600	96	92	22
76388	3000	102	92	22
76390	3000	96	108	22
6406	4100	102	124	22
76407	4995	142	86	22
76408	5300	102	164	22
76410	6500	118	142	22

Limited Tank Warranty: Rotonics warrants to the original purchaser all tanks manufactured by Rotonics to be free from defects in material and workmanship for a period of five (5) years from date of manufacture, with the exception of D.O.T. and Septic Tanks, which have a special warranty. The Guido Tanks also have a five (5) year warranty. **Review the chemical resistance guide and warranty instruction information prior to the installation and use of Rotonics Tanks. Hard-plumbing of tank is not recommended due to the expansive/contractive characteristics of Polyethylene. All weights, dimensions, and gallonage markers are approximate.**

Rotonics Manufacturing Inc.
 17038 South Figueroa St. • Gardena, CA 90248
 Phone: (310) 327-5401 • Fax: (310) 323-9567
 E-mail: california@rotonics.com
www.rotonics.com/tanks/guido.html


Establishing an Emergency Water Supply



Official Information from the California Department of Forestry and Fire Protection

Maintain an emergency water supply that meets fire department standards through one of the following:

- A community water/hydrant system.
- A cooperative emergency storage tank with neighbors.
- A minimum storage supply of 2600 gallons on your property.

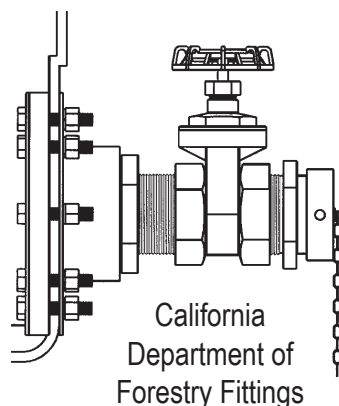

Rotonics Tanks have provided potable and emergency water supplies for over 30 years

Fittings and accessories installed per your specifications.



Limited Tank Warranty: Rotonics warrants to the original purchaser all tanks manufactured by Rotonics to be free from defects in material and workmanship for a period of five (5) years from date of manufacture, with the exception of D.O.T. and Septic Tanks, which have a special warranty. The Guido Tanks also have a five (5) year warranty. **Review the chemical resistance guide and warranty instruction information prior to the installation and use of Rotonics Tanks.** Hard-plumbing of tank is not recommended due to the expansive/contractive characteristics of Polyethylene. All weights, dimensions, and gallonage markers are approximate.

Rotonics Manufacturing Inc.
17038 South Figueroa St. • Gardena, CA 90248
Phone: (310) 327-5401 • Fax: (310) 323-9567
E-mail: california@rotonics.com
www.rotonics.com/tanks/guido.html